

MORANO

MORANO GS . Power Bollard

Designed for closed door operation. Comes with two access doors and cable outlet. Steel housing galvanised in and out. Includes separate bolt-on embedded base with two cable openings. Electrical assembly plate provided for configuration by others. Access doors come with cylinder locks for reliable safety and security. Choice of mica or DB finish.

Additional charge: Electrical configuration GS 1 – GS 6, pre-wired and ready for connection. Soft or RAL finish.

MORANO W . Water Bollard

Designed for open door operation. Comes with two access doors.



Fig.: Configuration examples


Product Name Housing Art. No. Colour

MORANO GS 60.14401.0 mica or DB finish

MORANO W 60.14410.0 mica or DB finish



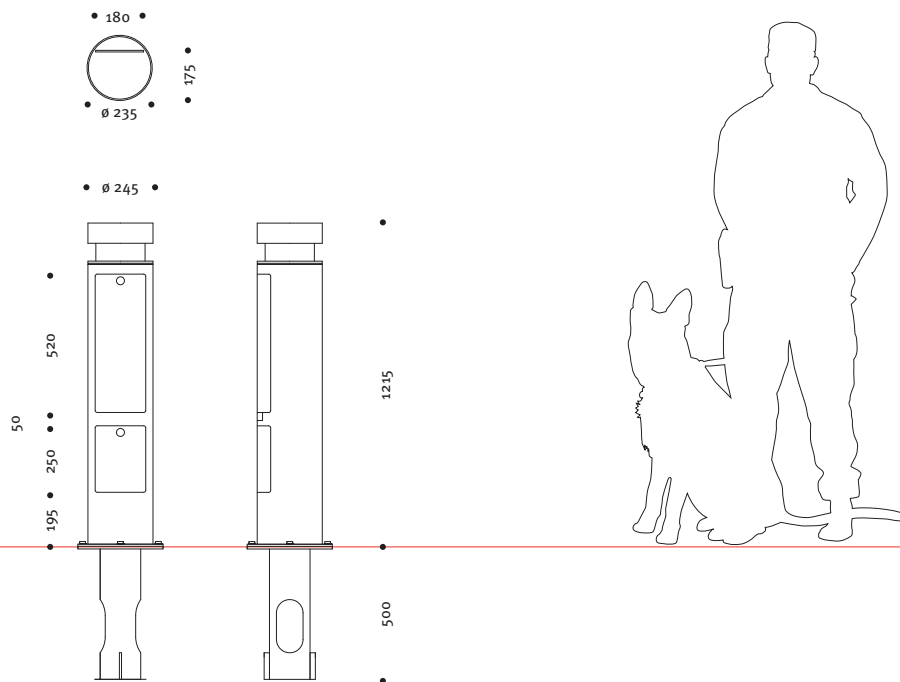

Order No.: Housing Art. No. + Configuration

Product information
www.hess.eu/o795






MORANO

IMPORTANT: Operation of the power bollard shall be subject to applicable local and national codes, guidelines and laws. The electrical assembly plate is designed for configuration by others (GS o). Any other configurations shown here serve solely as examples of potential configurations.

Configuration	Schuko 250 V / 16 A	CEE 250 V / 16 A 3p. 6 h	CEE 380 V / 16 A 5p. 6 h	Automatic Circuit Breaker B Type			Underground Cable Max.	
				16 A 1p.	16 A 3p.	32 A 3p.		
GS 0	 -	 -	 -	 -	-	-	-	1 x 5 x 16 ²
GS 1	6	-	-	-	6	-	-	1
GS 2	-	6	-	-	6	-	-	1
GS 3	3	-	1	-	3	1	-	1
GS 4	3	-	-	1	3	-	1	1
GS 5	3	-	1	-	3	1	-	1
GS 6	-	3	-	1	3	-	1	1



Configuration	Water Faucet ³ / ₄ "	Water Metre ³ / ₄ " cold	Shut-off Valve ⁵ / ₄ "
W 1	 2	 2	 1