

TOLEDO 250

TOLEDO 250 GS . Power Bollard

Designed for closed door operation. Comes with two access doors and cable outlet. Steel housing galvanised in and out. Includes separate bolt-on embedded base with two cable housings. Access doors come with cylinder locks for reliable safety and security. Electrical assembly plate provided for configuration by others. Choice of mica or DB finish.

Additional charge: Electrical configuration GS 1 – GS 6, pre-wired and ready for connection. Soft or RAL finish.

TOLEDO 250 W . Water Bollard

Designed for open door operation. Comes with two access doors.



Fig.: Configuration examples



Product Name Housing Art. No. Colour

TOLEDO 250 GS 60.12405.0 mica or DB finish

TOLEDO 250 W 60.12412.0 mica or DB finish



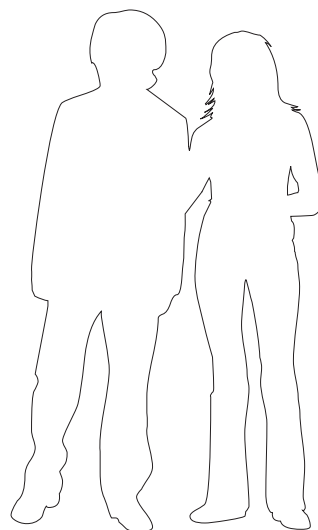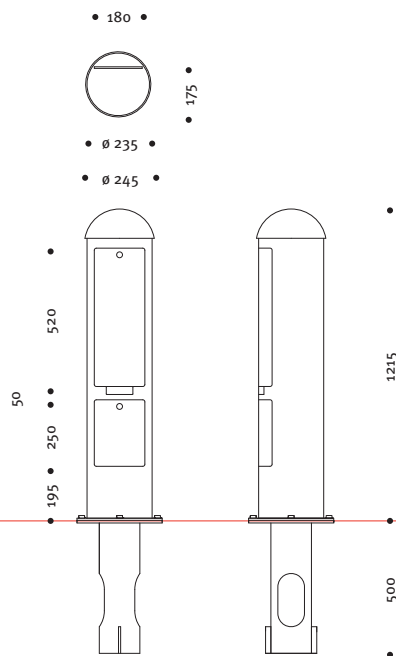

Order No.: Housing Art. No. + Configuration

Product information
www.hess.eu/o791






TOLEDO 250

IMPORTANT: Operation of the power bollard shall be subject to applicable local and national codes, guidelines and laws. The electrical assembly plate is designed for configuration by others (GS o). Any other configurations shown here serve solely as examples of potential configurations.

Configuration	Schuko 250 V / 16 A	CEE 250 V / 16 A 3p. 6 h	CEE 380 V / 16 A 5p. 6 h	CEE 380 V / 32 A 5p. 6 h	Automatic Circuit Breaker			Underground Cable Max.
					16 A	16 A	32 A	
					1p.	3p.	3p.	
GS 0	-	-	-	-	-	-	-	1 x 5 x 16 ²
GS 1	6	-	-	-	6	-	-	1
GS 2	-	6	-	-	6	-	-	1
GS 3	3	-	1	-	3	1	-	1
GS 4	3	-	-	1	3	-	1	1
GS 5	-	3	1	-	3	1	-	1
GS 6	-	3	-	1	3	-	1	1



Configuration	Water Faucet ³ / ₄ "	Water Metre ³ / ₄ " cold	Shut-off Valve ⁵ / ₄ "
			
W 1	2	2	1