

Specification sheets

Water bollard TOLEDO 250 W



Additional information

Water bollard TOLEDO 250 W


60.12412.0 GS 0
Water bollard TOLEDO 250 W
2 access doors and cable exit for open-door operation
==> WITHOUT water supply equipment
Housing of galvanised steel
Aluminium cap
Aboveground height is 1215 mm
Diameter: 245 mm
Clamps for the installation of customer-provided
Supply unit included
With flange plate
Separate embedded base with 2 openings for cable entry
All doors provided with cylinder lock for safety + security
Colour:RAL/HESS-DB+Glimmer (to be specified)
(Powder coating is not possible !!!)



Additional information

Water bollard TOLEDO 250 W

Drawings

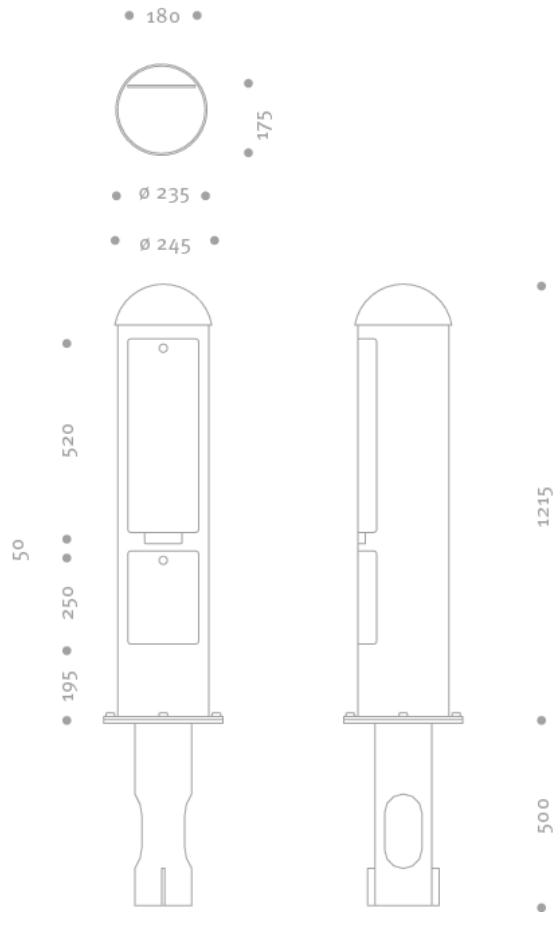

Downloads

Drawings: [Toledo_250_SM.png](#)

Catalogue page: [HESS_TOLEDO_250_vs_EN.pdf](#)

www.hess.eu

© Hess AG
11. June 2012