

Specification sheets

Power bollard TOLEDO 350 GS



Additional information

Power bollard TOLEDO 350 GS

60.12404.0 GS 0

Power bollard TOLEDO 350 GS

2 access doors and cable exit for closed-door operation

==> WITHOUT electrical equipment

Housing of galvanised steel

Aluminium cap

Aboveground height is 1108 mm

Diameter: 350 mm

With flange plate

Separate embedded base with 2 openings for cable entry

Electrical assembly plate for customer equipping

(to be mounted to separate embedded base)

All doors provided with cylinder lock for safety + security


Colour:RAL/HESS-DB+Glimmer (to be specified)



Additional information

Power bollard TOLEDO 350 GS

Drawings

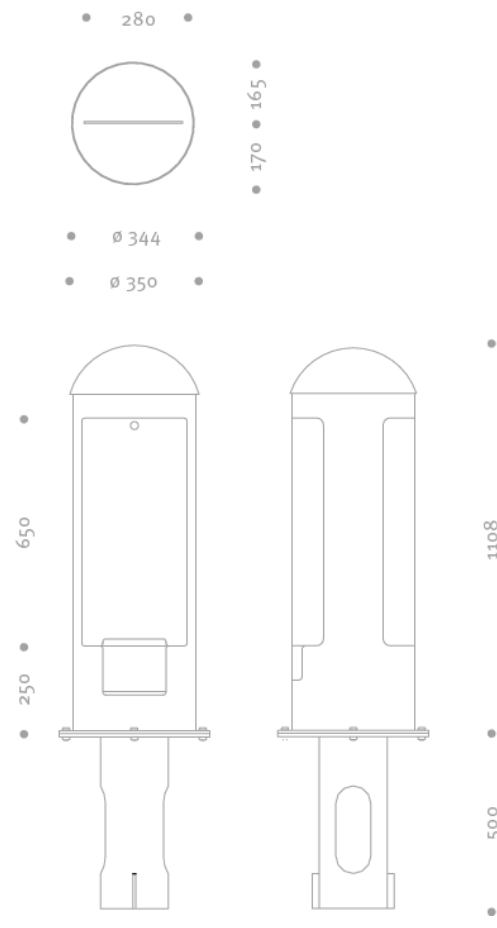

Downloads

Drawings:

[Toledo_350_SM.png](#)

Catalogue page:

[HESS_TOLEDO_350_vs_EN.pdf](#)

Projects

Power bollard TOLEDO 350 GS



www.hess.eu

© Hess AG
11. June 2012